

LED DRIVER 350mA 10W IP20 DALI



EL-produkter as

EL-NR: 32 080 21

Generelt:

LED driver for konstant strøm (350mA).
Dimbar med DALI, 1-10V og impuls. Maks belastning 10W.
Hurtigkoblinger på primær- og sekundærside.
Leveres med ferdig montert AMP plug for downlights.

NB! AMP pluggen er beregnet for bruk på våre downlights. Ved bruk av driveren på andre belysningsprodukter, må denne fjernes.

Tilkobling:

220-240Vac, 50/60Hz




SPESIFIKASJONER		
Input	Input voltage	220-240Vac, 50/60Hz
	Power factor (PF)	≥0.9 (@ 240Vac input, full load and without dimmer)
	Efficiency	≥80%(@ 240Vac input, full load and without dimmer)
	Inrush current	<15A@230V AC
	Input current	0.10A Max
	No-load power	≤0.5W
Output	No load output voltage	40±1.5Vdc
	Output current/Voltage	350mA, 3-30Vdc(1-10pcs 1W LEDs)
	Current accuracy	±5%
	Output power	10.5W Max
Dimming	Dimming mode	DALI , PUSH Dimming , 1-10V
	Dimming range	1%-100% (DALI)
Environment	Working temperature	-25°C~50°C, TC:75°C
	Storage temperature	-40°C~80°C
Safety and EMC	Insulation class	Class II, SELV
	Withstand voltage	Input-Output: 3.7kVac/5mA/1min
Protection	Short circuit	Protection mode: Auto recovery
	Over temperature	Protection mode: Auto recovery
Others	Dimension	150x52x28mm
	Enclosure	Plastic, white
	IP rating	IP20
	Connection	Input: Push terminal L, N, L, N, PUSH, PUSH, DA+ , DA- , DA+ , DA- Output: Push terminal (1-10V+, 1-10V-) (LED +, LED -)
	Life time	50000H
	High frequency flickering	Non-flickering for full dimming range (less than 2%)

LED DRIVER 350mA 10W IP20 DALI




EL-produkter as

MÅLSKISSE

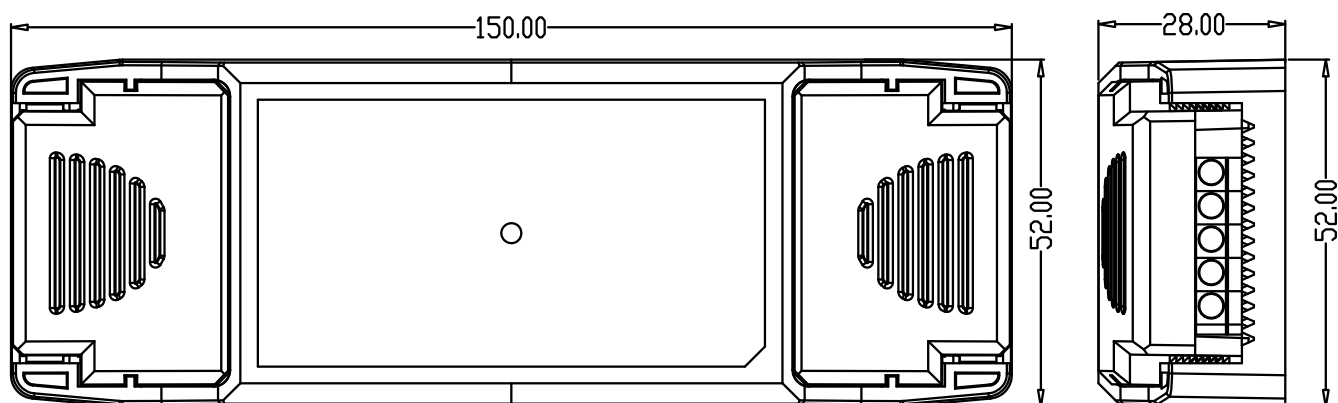

KOBLINGSSKJEMA

DALI

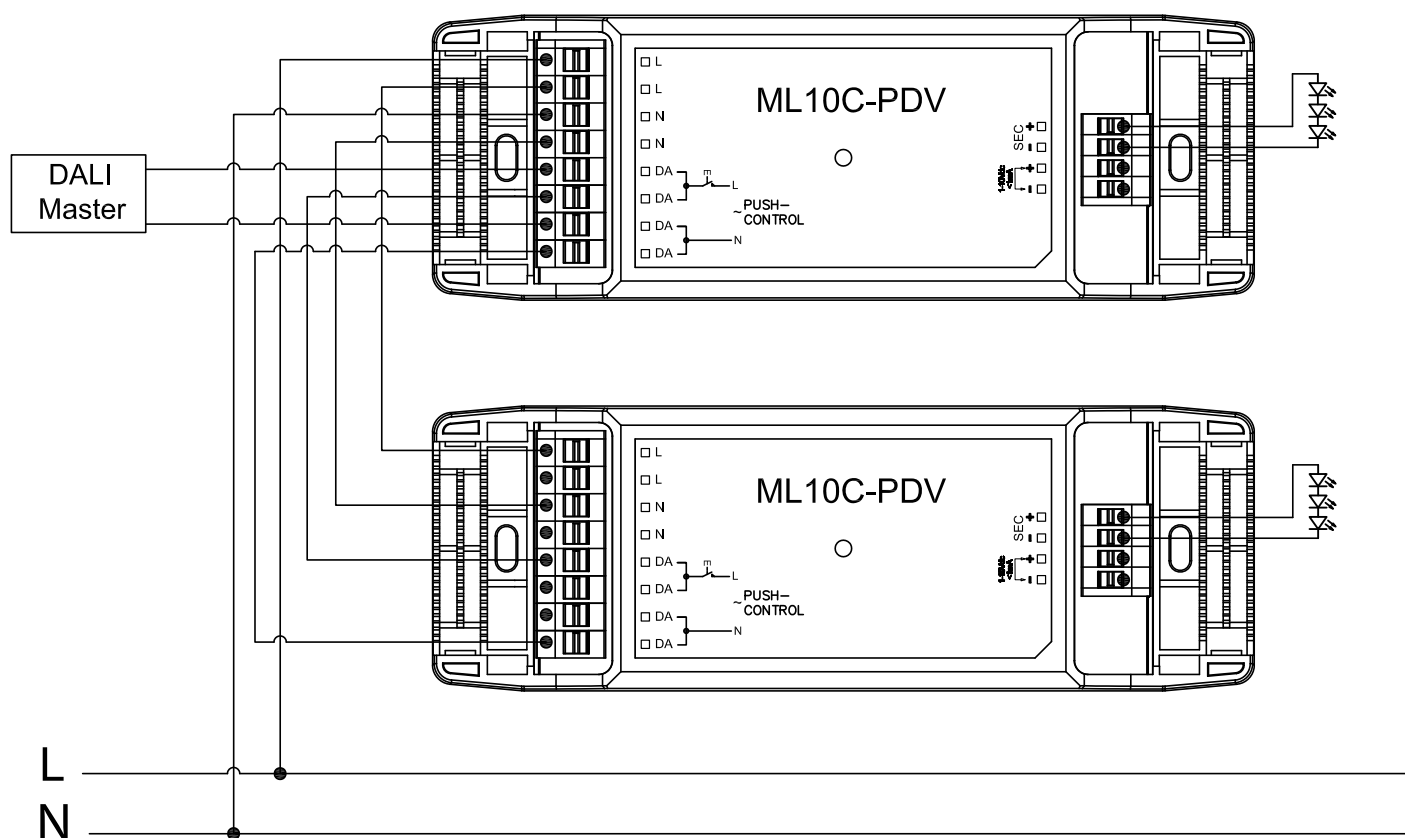


LED DRIVER 350mA 10W IP20 DALI



EL-produkter as

1-10V

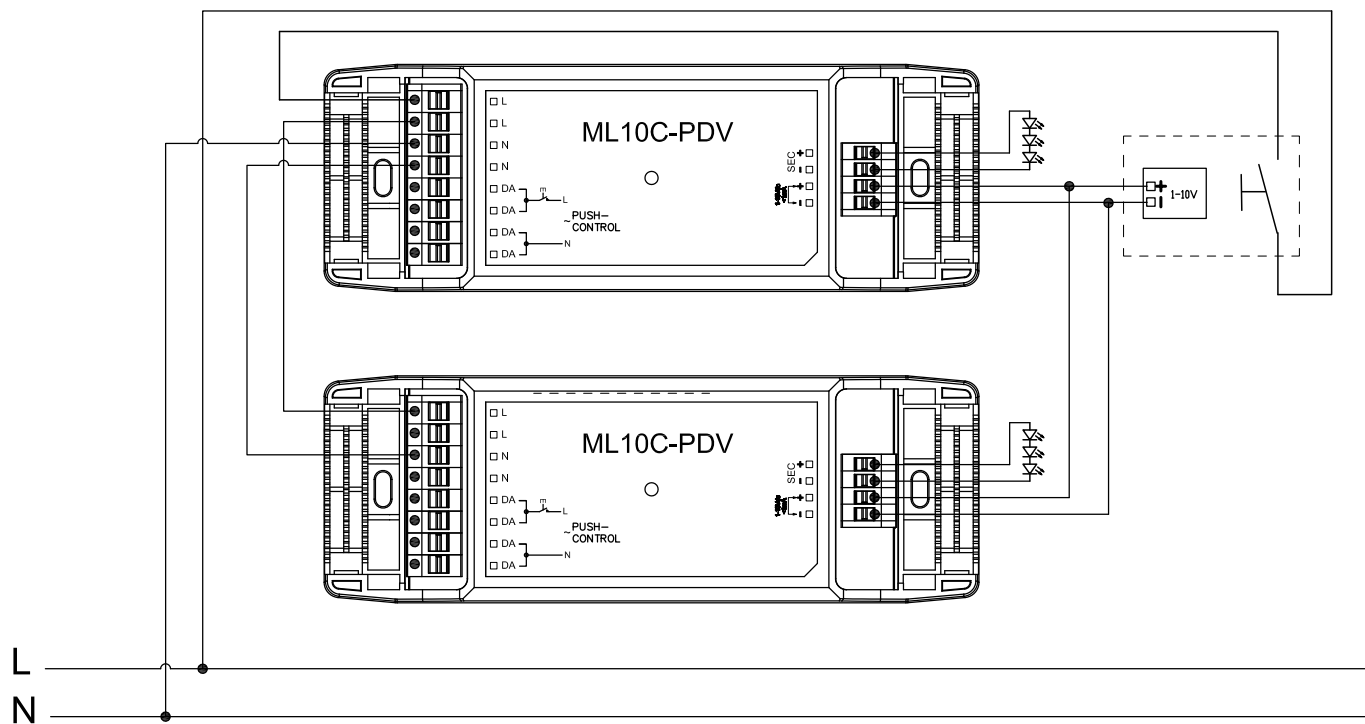

IMPULS

