


NORMALIT

Hermetic Avant



DV18: L= 600mm
DV36: L= 1110mm
DV60: L=1500mm

ATENCIÓN:

Desconectar el aparato antes de realizar cualquier tipo de operación de mantenimiento. Esperar hasta que la luminaria se enfríe completamente.

La luminaria ha de ser instalada únicamente por personal cualificado y conectada conforme a las normas vigentes.


Lámpara no reemplazable por el usuario.

WARNING:

Switch-off the power supply before carrying out any maintenance operation. Wait until luminaire have completely cooled off.

The luminaire shall be installed by a qualified electrician and wired in accordance with the current electrical regulations.

Lamp not replaceable by use r.

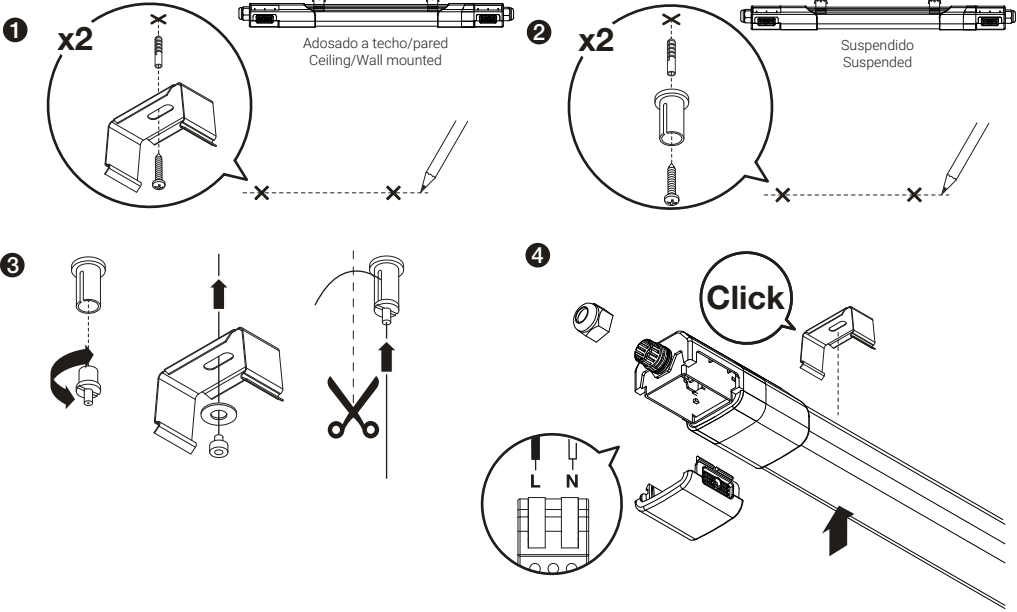

Ajuste de parametros del sensor de presencia / Presence sensor parameter settings

DV18S / DV36S / DV60S

S1	S2	Sensibilidad/Sensitivity *
ON	ON	100%
ON	OFF	75%
OFF	ON	50%
OFF	OFF	25%

*Altura máxima<4m radio<4m

*Max height<4m, radius<4m

S3	S4	Tiempo/Time
OFF	OFF	10 s
OFF	ON	1min
ON	OFF	5min
ON	ON	15min

S5	S6	Lux **
OFF	OFF	10lux
OFF	ON	30lux
ON	OFF	50lux
ON	ON	Deshabilitado/Disable

**Ajuste de fotocélula

**Photocell Set

