
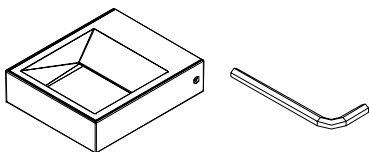


If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced




H05RN-F 3×1.0mm²

for cable/pipe mm: Ø5-10

① ② ③ ④ ⑤ ⑥

Freely choose tool to fix the backstand.

Freely choose tool to fix the backstand.

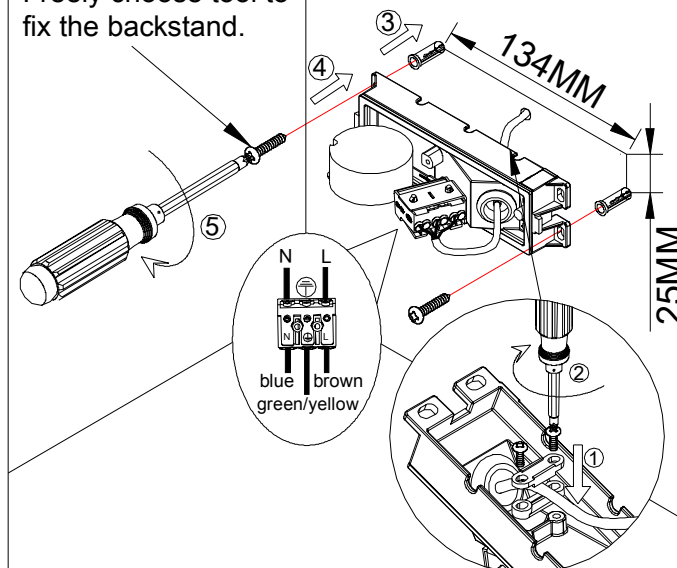

Please make sure the thickness of the wood board no less than 5mm

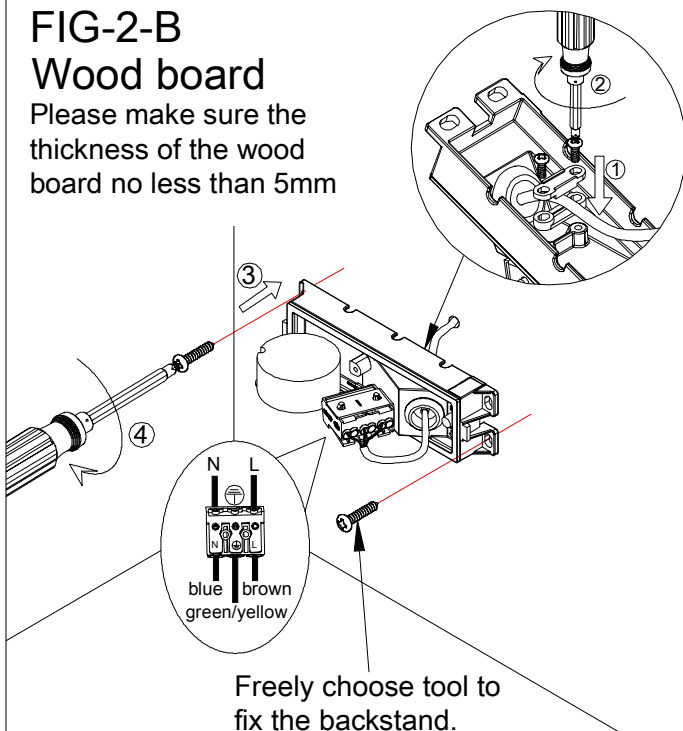


FIG-3

Diagram illustrating the connection of the power cord to the unit and the wall outlet. The power cord is plugged into the back of the unit (1). The unit is then plugged into the wall outlet (2). The power cord is then plugged into the wall outlet (4).

Before installation, please keep the base horizontal and make sure to install with following steps:
Half lock one of the side screw first, full lock the other one, then go back to the first screw to full lock.

FIG-4

FIG-4

ON
OFF