




EL-produkter as

OPERATING MANUAL

Moon M320- DALI

Important: Please read the instruction manual carefully prior to installation and keep it for future reference.

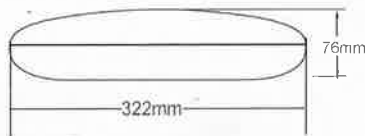

Ordering code	Product Fitting series	Power (W)	Function Description
M320 18 DAL	M320	18	DALI control LED Fixture (with LED DALI driver)
M320 28 DAL	M320	28	DALI control LED Fixture (with LED DALI driver)

Mounting: Wall or Ceiling


Light brief features:

CRI(Ra): >80Ra

Life Time: 5years

Light Source: LED SMD2835

Input:220V-240V 50/60Hz





Accessories



No.	Pic.	Qty.	Usage
1		3	Fix light
2		3	Plastic parts

Color temperature code:

Code	Color temperature	CCT(K)	Lumen	
			18W	28W
30K	Warm White	3000	1470	2400
40K	Natural White	4000	1560	2520
50K	Cool White	5000	1580	2570

Installation

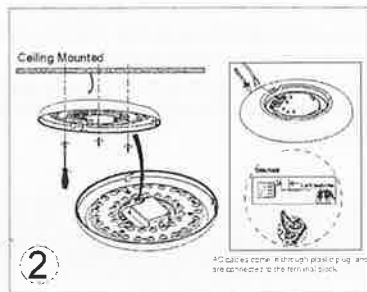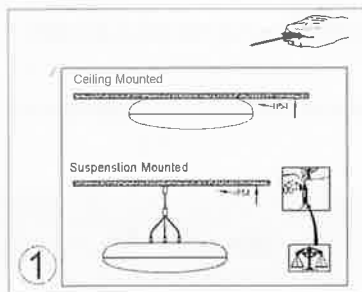

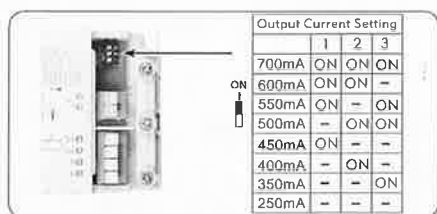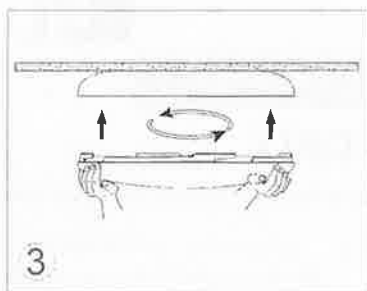


1. The current can be easily configured by choosing the correct combination of the DIP switches, (see table on the left).
2. Factory setting: 450mA, 18W;
If you want 28W, pls choose 700mA.

Fig. A

Maintenance

1. Cut off the main power first
2. Don't touch LED while maintaining or cleaning
3. Don't use chemical reagent to clean lamp.



Environmental protection: waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Caution:

1. The product must be installed by professional technicians and power supply must be cut off before installation.
2. The diameter for AC input wire is 0.75mm² (complying with 60245 IEC57), which complies with the latest IEE electrical standards or national standards.
3. Do not touch the electronic circuit and its components.
4. Contact an authorised technical service centre for any repairs possibly required use only original spare parts.
5. Do not touch LED while installing or maintaining.
6. Sealing the entrance hole with glue after install is needed.
7. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

