

LED DRIVER 10W IP20 IMP/1-10V



EL-produkter as

EL-NR: 32 046 86

Generelt:

LED driver for konstant strøm (350mA).
Dimbar med 1-10V og impuls. Maks belastning 10W.
Min belastning 2,1W. Hurtigkoblinger på primær- og sekundærside.

Tilkobling:

220-240Vac, 50/60Hz



SPESIFIKASJONER		
INPUT	Input voltage	220-240Vac
	Input frequency	50Hz/60Hz
	Input current	0.06A(max)
	Power factor (Note 1)	≥0.9
	Efficiency (Note 1)	≥82%
	Stand-by power (Note 3)	≤0.5W
OUTPUT	Output current / voltage	350mA 6~30V DC 10.5W max
	No-load output voltage	40VDC MAX.
	Current accuracy	±5%
DIMMING	1-10V dim	Yes, port-current <1 mA
	Push dim	Yes
	Potentiometer	Yes, 100kΩ
	Supportable signal wire length	20m Max. between dimmer and dim interface
ENVIRONENT	Working temp.(Ta)	-25 ~50
	Surface temp.(Tc)	85
	Working humidity	85% Non-condensing
	Storage temp.	-40 ~80
	Life time	50,000 hours
PROTECTION	Isolation class	Class II
	Protection class	IP20
	Over voltage	300Vac, 2h
	Short circuit	Protection type; auto rest
	No load	Protection type; auto rest
	Over temperature	Protection type; auto rest
OTHERS	Safety	EN61347-1 EN61347-2-13
	EMC	EN55015, EN61000-3-2, EN61547, EN61000-3-3
	Approvals	Semko, CE, RoHS
	Withstand voltage	IN-OUT:3.75KVAC/5mA/60s
	Dimension (LxHxW)	80x52x25mm
	Connection	Press-in type terminals, 0.75-1.5mm²Input: L, N, PUSH Output: SEC(+) SEC(-), 1-10V(+),1-10V(-)


Note:
1, Power factor and efficiency is detected at 230Vac input and full load.
2, Standby power is detected at 230Vac input and switch off led load by push button.

LED DRIVER 10W IP20 IMP/1-10V




EL-produkter as

MÅLSKISSE

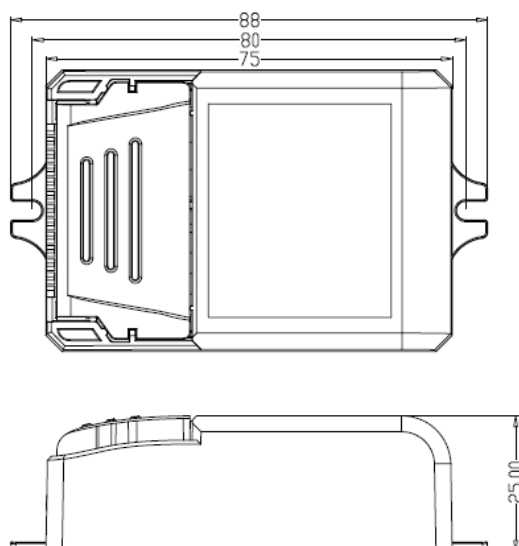

KOBLINGSSKJEMA

IMPULS

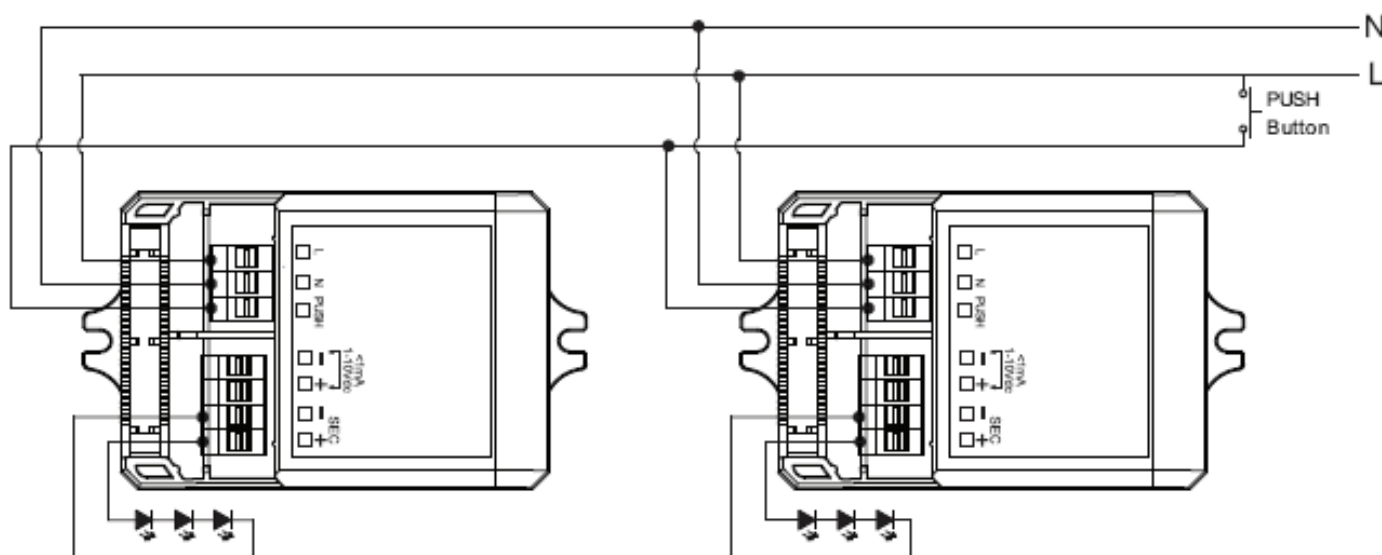

LED DRIVER 10W IP20 IMP/1-10V



EL-produkter as

1-10V

