

LED DRIVER 350mA 3-7W TRIAC DIM



EL-produkter as

EL-NR: 3208056

Generelt:

LED driver for konstant strøm (350mA).
Dimbar med triac dim. Hurtigkoblinger på primærside.

NB! AMP pluggen er beregnet for bruk på våre downlights. Ved bruk av driveren på andre belysningsprodukter, må denne fjernes.

Tilkobling:

220-240V, 50/60Hz
Antall drivere per 16 A Type C sikring = 25 stk



SPESIFIKASJONER


Input	Input voltage	220-240Vac, 50/60Hz
	Input current	0.060A Max
	Power factor (PF)	≥0.9 (@ 240Vac input, full load and without dimmer)
	Efficiency	≥76% (@ 240Vac input, full load and without dimmer)
	No-load power	≤1W
Output	Max. output voltage	26Vdc
	Output current	350mA, +/-5%
	Output voltage	9-21Vdc
Dimming	Dimming mode	Leading edge & Trailing edge dimming
	Dimming range	8%-100%
	Start level at the same time	1) Simon DS9L2 and EL200 dimmer: 8-10% 2) EL RL dimmer: 15-20%
Safety and EMC	Withstand voltage	Input-Output: 3.7kVac/5mA/1min
	EMI	Compliance to EN55015
Environment	Working temperature	-25℃~45℃, Tc: 75℃
	Storage temperature	-40℃~80℃
Protection	Short circuit	Protection mode: Auto recovery
	Over temperature	Protection mode: Auto recovery
Others	Dimension	115x41x25mm
	Enclosure	Plastic, white
	IP rating	IP20
	Connection	Input: Push terminal L, N Output: Screw terminal block , LED +, LED -)
	Life time	50,000h
	Certification	CE
	High frequency flickering	Non-flickering for full dimming range
	Packing	Bubble bag

LED DRIVER 350mA 3-7W TRIAC DIM



EL-produkter as

MÅLSKISSE

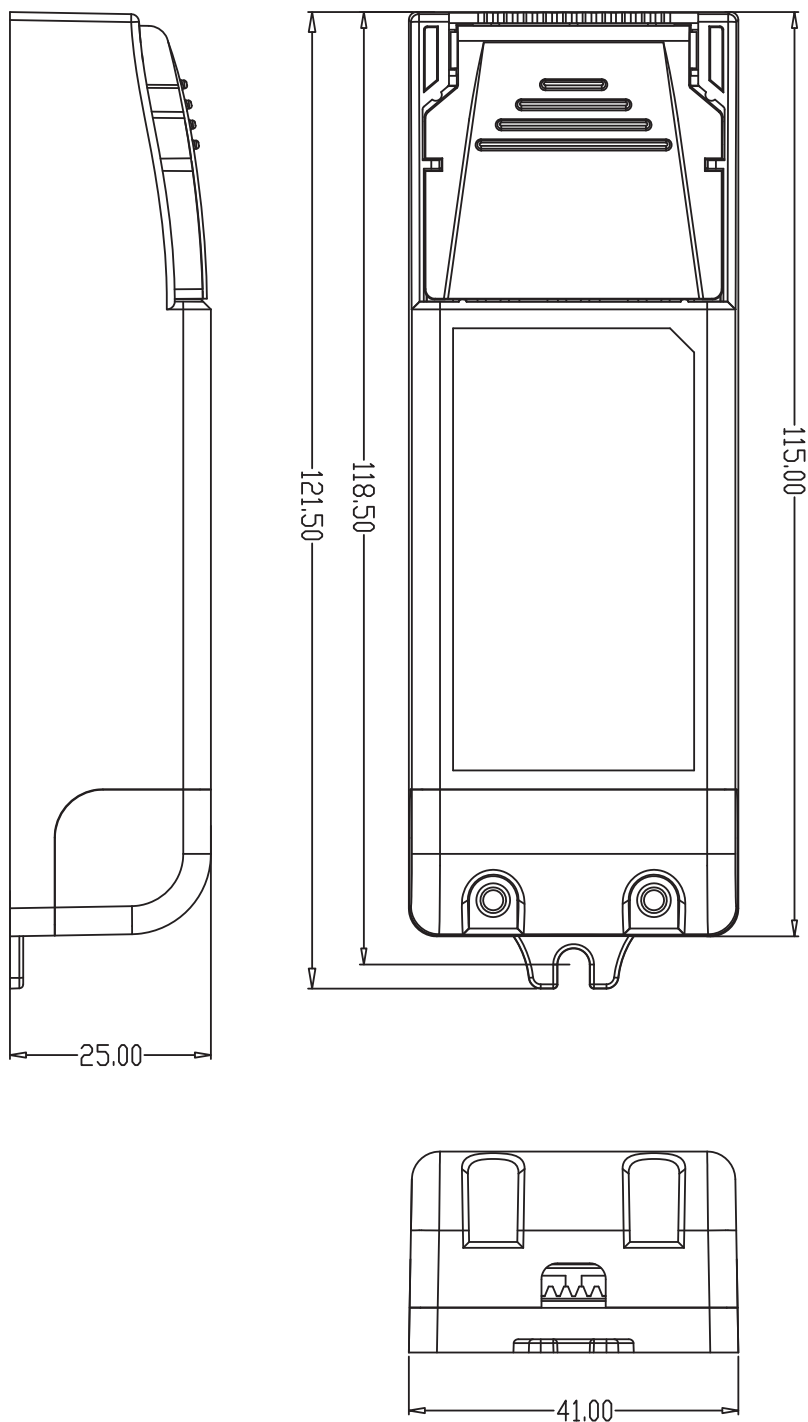

LED DRIVER 350mA 3-7W TRIAC DIM



EL-produkter as

KOBLINGSSKJEMA

