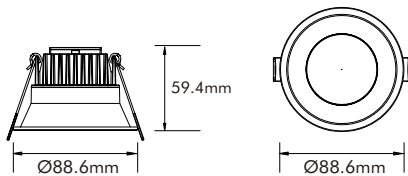


Black 
 White 


Cut-out: Ø80mm

FEATURES

- Compatible with leading and trailing edge phase cut dimmers.
- 3-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC22V/330mA
Power	10W
Rated Input Current	0.05A
PF value	>0.9
Ingress Protection	IP54
Operating Temperature	-10—40℃
Dimmability	Triac dimmable with DIMMATE driver

Optical Data

LED Brand	Bridgelux SMD LED
CRI	Ra> 80
Colour temperature	2700K/3000K/4000K
System luminous efficacy up to	64lm/W

Packaging

Box Dimensions	L115 x W115 x H105mm
Box Net Weight	0.262Kg
Box Gross Weight	0.312Kg
Carton Dimensions	L595 x W365 x H235 mm/30 PCS
Carton Net Weight	7.86Kg
Carton Gross Weight	10.16Kg


RoHS   

Model	CCT		Beam Angle	Lumen	Efficacy
DL45-10-XX-03	2700K	CRI 80+	100°	576lm	64lm/W
DL45-10-XX-03	3000K		100°	564lm	61lm/W
DL45-10-XX-03	4000K		100°	589lm	64lm/W

 * Specification subject to change without prior notice. Contact info@nm-led.com for more technical information.